

SD/HD/3G-SDI Multi-Format Monitors

LVM-171S *New!*




Multi Format | 20



Main body Dimensions

- Main Body : 445 x 264 x 78.4 (mm) / 17.52 x 10.39 x 3.09 (inch)
- With stand : 492.2 x 289 x 137.5 (mm) / 19.38 x 11.38 x 5.41 (inch)
- Weight : 6.8kg / 14.99lbs

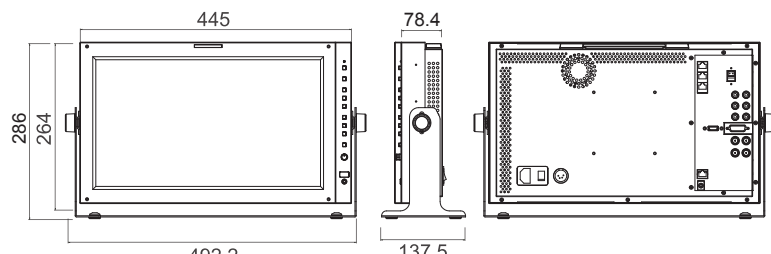

Optional Accessories



16.5" 10-bit Quality Control Monitor

The LVM-171S is our top QC-Grade 16.5" model utilizing the 10-bit, wide color gamut and wide viewing angle IPS LCD panel with 1920 x 1080 resolution. Based on precision color calibration and video processing, the LVM-171S reproduces high picture quality and accurate colors.

Equipped with dual 3G-SDI input, the LVM-171S supports Picture-by-Picture with dual scaler and interlacer. It also supports various professional features such as 3D LUT import and F/W update via USB, Waveform/Vectorscope, Focus Assist, Timecode, UMD and CC with advanced UI based on Linux.

Product Highlights

- 16.5" Full HD Resolution (1920 x 1080)
- 99% coverage of DCI-P3 color gamut
- 1.07B Colors (10bit)
- Luminance up to 450cd/m²
- Contrast Ratio of 1,400:1
- Matte Finish Panel
- 1:1 Pixel Mapping Modes for HD
- 3D LUT import/export by USB Stick
- Closed Caption (OP42/47, CC-608/708, CC-KOR)
- Waveform / Vector Scope (Advanced)
- PBP (Picture by Picture)
- Audio Level Meter
- Observer(Network) control by Ethernet
- TVLogic Color Calibration Utility
- Blue Only / Mono
- Key Lock
- Fast Mode
- Time Code Display
- User Aspect
- Various Scan Modes
- H/V Delay
- Marker
- Range Error
- UMD

Size	16.5"
Resolution	1920 x 1080 (16 : 9)
Pixel Pitch	0.1905mm
Color Depth	1.07B
Viewing Angle (Typ.)	178°(H) / 178°(V)
Luminance (Max.)	450cd/m ² (center)
Contrast Ratio	1400:1
Display Area	366(H) x 206(V) mm

Input		
1 x DVI-I	DVI Input	
1 x HDMI	HDMI Input	
3 x BNC	Analog Input	
2 x BNC	SDI A/B Channel Input	
Output		
3 x BNC	Analog(Loop Through Out)	
2 x BNC	SDI A/B Channel Output (Loop Through Out)	
Input Signal		
Analog	CVBS / S-Video / Component	
3G-SDI	2.970Gb/s	
HD-SDI	1.485Gb/s	
SD-SDI	270Mb/s	
DVI-Analog	640x480/720x400/800x600/1024x768/1280x1024/1600x1200/1920x1080	
DVI-D (PC mode)	640x480/720x400/800x600/1024x768/1280x1024/1600x1200/1920x1080/1920x1200	
DVI-D (HDMI mode)	1080p(60/50/30/25/24)/1080i(60/50)/720p(60/50)/480i(60)/480p(60)576i(50)/576p(50)	
HDMI	480i/480p/576i/576p/720p/1080i/1080p/640x480/720x400/800x600/1024x768/1280x1024/1600x1200	
Analog Input Spec		
CVBS	1.0Vpp (With Sync) NTSC. PAL	
S-Video	1.0Vpp (Y with Sync), 0.286/300Vpp(C)	
Component Video	1.0Vpp (Y With Sync), 0.7Vpp(Pb,Pr)	
SDI Input Signal Formats		
SMPTE-425M-A/B	1080p (60/59.94/50/30/29.97/25/24/23.98/30sF/29.97sF/25sF/24sF/23.98sF)	
SMPTE-372M (Dual Link)	Dual HD-SDI YCbCr(4:2:2)	1080p (60/59.94/50)
	Dual HD-SDI YCbCr/RGB(4:4:4)	1080i (60/59.94/50) 1080p/psF(30/29.97/25/24/23.98)
SMPTE-274M	1080i(60/59.94/50) 1080p(30/29.97/25/24/24sF/23.98/23.8sF)	
SMPTE-296M	720p(60/59.94/50)	
SMPTE-260M	1035i(60/59.94)	
SMPTE-125M	480i(59.94)	
ITU-R BT.656	576i(50)	
2K Format	2048x1080p(24/24sF/23.98/23.98sF)	
Audio IN	Embedded Audio / Analog stereo (Phone Jack)	
Audio OUT	Internal Speaker(Stereo) / Analog stereo (Phone Jack)	
Power	DC 12V / AC 100~240V(50~60Hz)	
Power Consumption	TBD	
Operating Temperature	0°C to 40°C (32°F to 104°F)	
Storage Temperature	-20°C to 60°C (-4°F to 140°F)	
Accessory	AC Power Cord / Stand	